SIMAGIC

TB-1 | Quick Guide

1. List of Accessories

1.1 List of Standard Accessories

- USB data cable X 1
- Elastomer kit X 1
- Button Head Socket Cap Screw M6-14 X 4
- Roll in T-Nut with Ball Spring M6-40 X 4
- Allen Key (2mm/4mm/6mm) X 3

1.2 List of Optional Accessories

P-LOK:


- Multifunctional L-Shaped Bracket X 1
- Button Head Socket Cap Screw M6-14 X 4
- Countersunk Head Screw M6-14 X 4
- Roll in T-Nut with Ball Spring M6-40 X 4
- Allen Key (4mm) X 1

2. Installation Method


2.1 Product Assembly

① Mounting the handbrake.

(Note: The L-Shaped mounting plate can be purchased separately.)

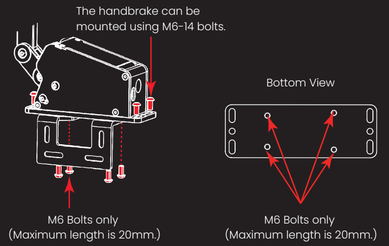


② Product connection ports.




2.2 Elastomer Swap

① Remove the front plate.




② Remove the bolt.

(Note: Make sure the power is OFF during the replacement.)




③ Swap the elastomer.

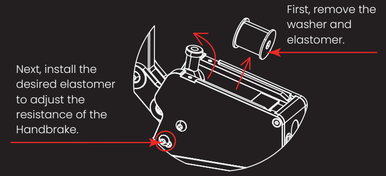


2.3 Handle Adjustment

2.3.1 Adjust the lever.




2.3.2 Switching lever position

① Remove the lever.



② Flip the lever.

Remove the M6-14 bolts, flip the position of the handle, then re-insert the bolts and tighten.



Software & applications

Install SimPro Manager on PC to complete setup

Product Tutorial (Scan the QR code to view more)

Note: SimPro Manager required to complete setup